


PRODUCT: SMA FEMALE TO SMA FEMALE ADAPTER, 50 OHM
PRODUCT CODE: E3801, Paratronic Oy

Description	Material	Note	General information	
Contact pin	Beryllium copper	1	Dimensions in millimeters (mm), unless otherwise specified. RoHS compliant. Directive 2015/863 with exemption 6(c) Note, finish, plating thickness in micro-inches, μin (minimum): 1. Gold (3) over nickel (50) over copper (50) 2. Thin gold over nickel (50) over copper (50)	Impedance 50 ohm Frequency range DC - 18 GHz VSWR 1.20 max Insertion loss ≤ 0.3 dB Insulator resistance ≥ 5 G Ω Resistance, center contact ≤ 3 m Ω , outer contact ≤ 2 m Ω Test voltage 1000 V rms, working voltage 480 V rms Power handling ≤ 200 W @ 2 GHz RF-leakage -60 dB min
Insulator	PTFE	-		
Body	Brass	2		

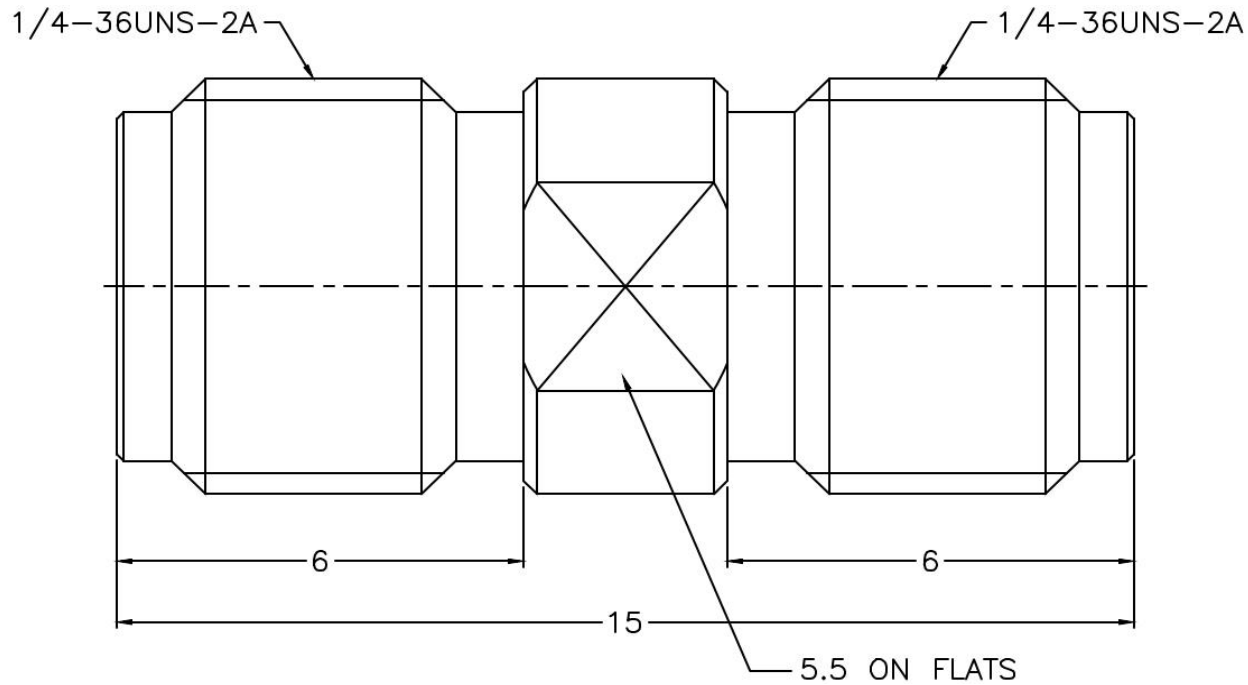

Title	Value
Drawing date	22.1.2023
Version	A
Website	www.paratronic.fi