


## Wiring of the WWS with external alarm interface

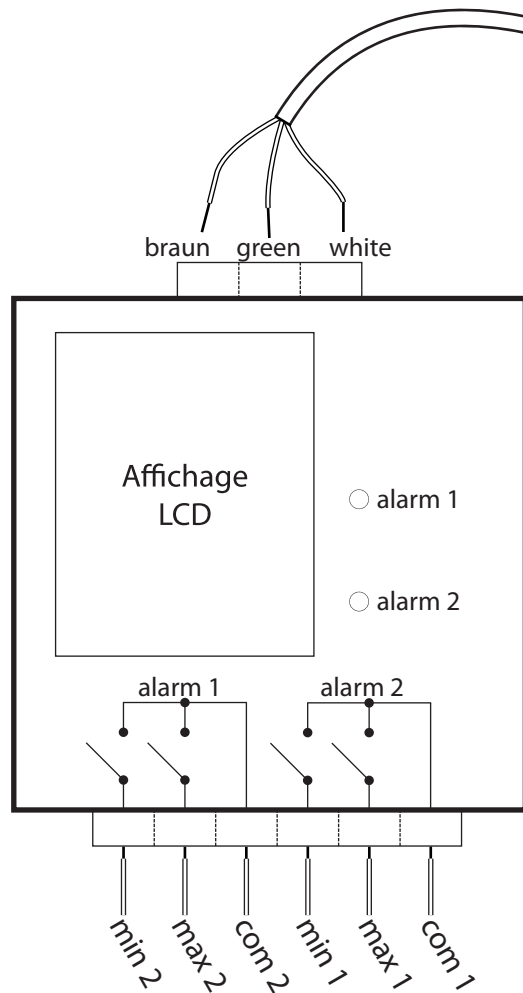

Internal relay specifications:

- Bistable (keep the current state even if the WWS is not powered)
- I max 1A / V max 48V (DC/AC)

Remarks: The outputs can command high power relays or power systems.

Maahantuonti ja myynti:

**PARATRONIC OY**

Hynnäläntie 414 63250 RANTALA  
Puh 0400 297526 paratronic@paratronic.fi

[www.paratronic.fi](http://www.paratronic.fi)



JDC ELECTRONIC SA  
Rue des Uttins 40  
CH-1400 Yverdon  
Switzerland

[www.jdc.ch](http://www.jdc.ch)  
[info@jdc.ch](mailto:info@jdc.ch)  
P: +41 24 445 21 21  
F: +41 24 445 21 23